# Organic Radicals in Pyrolysis of Furans and Biomass-Based Fuels

Kimberly Urness,[1] Jong-Hyun Kim,[1] Thomas K. Ormond,[1] John W. Daily,[1] Mark R. Nimlos,[2] Musa Ahmed,[3] Amir Golan,[3] John F. Stanton,[4] and G. Barney Ellison[1]

[1]Dept. Chemistry and Biochemistry, University of Colorado at Boulder, 215 UCB, Boulder, CO 80309, USA; [2]National Renewable Energy Laboratory, 15013 Denver West Parkway, Golden, CO 80401, USA; [3]Chemical Sciences Division, Lawrence Berkeley National Laboratory, Berkeley, CA 94720, USA; [4]Dept. of Chemistry and Biochemistry, College of Natural Sciences, The University of Texas at Austin, 1 University Station A5300, Austin, TX 78712, USA
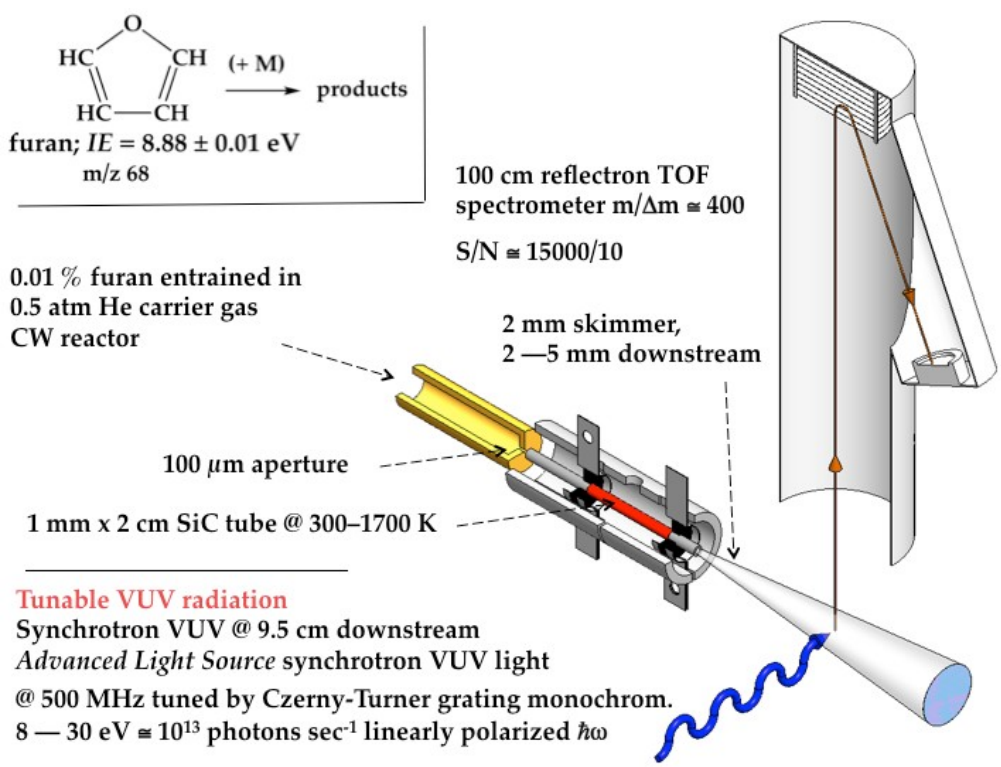
A heated SiC microtubular reactor has been used to decompose the biofuels furan, 2-methylfuran, and 2-methylfuran-$d_6$. The pyrolysis experiments are carried out by passing a dilute mixture of furans (roughly 0.01 – 0.1%) entrained in a stream of a buffer gas (either He or Ar) through a heated SiC reactor that is 2-3 cm long and 1 mm in diameter. Typical pressures in the reactor are 50 - 200 Torr with the SiC tube wall temperature in the range 1200 - 1700 K. Characteristic residence times in the reactor are 50 – 200 μsec after which the gas mixture emerges as a skimmed molecular beam at a pressure of approximately 10 μtorr. The reactor has been modified so that both pulsed and continuous mode can be studied, and results from both flow regimes are presented. Using various detection methods (Fourier transform infrared spectroscopy, IR, and both fixed wavelength and tunable synchrotron radiation photoionization mass spectrometry, PIMS), a number of products formed at early pyrolysis times (*ca.* 100 – 200 μs) are identified: $CH_3$, CO, HCCH, $CH_2CH_2$, $HCCCH_2$, $CH_3CCH$, $CH_2CO$, $CH_2CHC{\equiv}CH$, and $CH_3CH_2C{\equiv}CH$. Experiments on ALS Beamline 9.0.2 have provided insight into the dynamics of pyrolysis of furan rings.